




## Hinged Slam face Doors

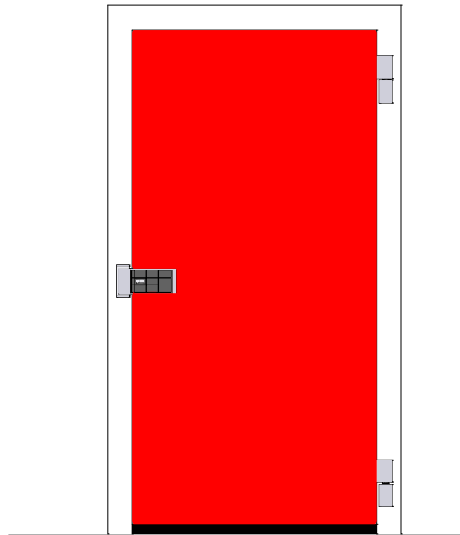

### Manufactured by

The doors are manufactured by Flexicold at their Bordon based factory.

### Door Leaf

- The door leaves can be manufactured as timber less.
- Standard door thickness is 100mm

#### ● **Insulation core**

Mineral Fibre  
Polyisocyanurate.

#### ● **Finish**

White food safe laminate  
Coloured HP 200  
Coloured PVF2  
Flat Glasbord  
Embossed Glasbord  
Stainless Steel

### Fittings

- Hinges – Fermod 556
- Lock – Fermod 621 complete with internal release

#### **DH Holdings Ltd t/a Flexicold Manufacturing**

Unit 19 & 20, Old Station Way, Bordon Hants, GU35 9HH

**Tel:** 01420 473229 **Fax:** 01420 478474 **Email:** [sales@flexicold.co.uk](mailto:sales@flexicold.co.uk)

Company reg no: 0306 7319 VAT reg no 744 5601 35



### **Door Frames**

- Frames would be manufactured with exterior grade plywood core.
- The frames would be encased in  
White food safe laminate  
Coloured HP200  
Coloured PVF2  
Stainless steel
- The frames would be securely fixed to the insulated panelling by means of nylon bolts.
- The frames can be designed to fit into a brick opening or into an opening formed in the metal cladding of a building.

### **Optional Extras**

- Kick plates
- Redlam (Break glass) bolts
- Fermob Panic release bar
- Vision panel
- They can be manufactured in pairs

### **Low Temperature doors**

- The doors would come complete with low voltage heater tapes and transformer.
- To install the threshold heater a recess must be provided by the main contractor in the doorway and adjacent to main freezer recess
- Size is Clear opening width of door opening x 300mm x the depth of main recess.

### **Sizes**

The doors are manufactured to any size requested.