


1. Model code

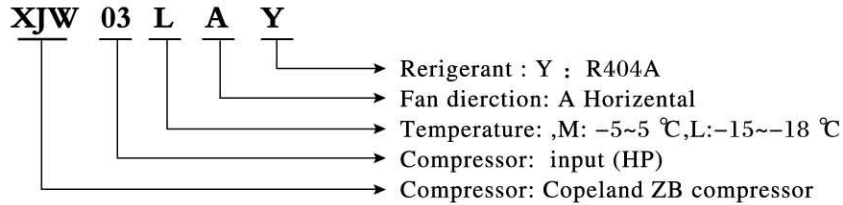

2. Specification

Model		XJW02MA	XJW03MA	XJW04MA	XJW05MA	XJW06MA	XJW08MA	XJW09MA	XJW10MA	
Temperature (°C)		5°C ~-5 °C								
Refrigerant		R404A								
Power supply		380V/50 HZ/3PH								
Compr	Type	Scroll								
	Model	ZB15KQ	ZB21KQ	ZB30KQ	ZB38KQ	ZB45KQ	ZB58KQ	ZB66KQ	ZB76KQ	
	Number	1	1	1	1	1	1	1	1	
Cond	Fan number	1	1	2	2	2	4	4	4	
	Air flow (m3/h)	3200	4600	6400	6400	9200	12800	12800	18400	
	Input (W)	110	150	110×2	110×2	150×2	110×4	110×4	150×4	
Capacity and input	Evap 0°C	Cap (W)	4550	6600	8550	10800	13350	17400	20000	23400
		input (W)	1810	2530	3290	3940	4780	6100	6750	8250
	Evap -5°C	Cap (W)	3750	5500	6800	8800	11100	14150	16500	19500
		input (W)	1840	2500	3290	3900	4780	6100	6750	8000
	Evap -10°C	Cap (W)	3050	4400	5150	6900	8950	11050	13400	15800
		input (W)	1870	2480	3280	3890	4800	6150	6700	7950
Pipe	Gas pipe (mm)	φ 22	φ 22	φ 22	φ 22	φ 22	φ 28	φ 28	φ 28	
	Liquid pipe (mm)	φ 12	φ 12	φ 12	φ 12	φ 12	φ 16	φ 16	φ 16	
Weight (kg)		86	90	138	141	143	233	233	240	
Over all	A (mm)	1100	1100	1100	1100	1100	1700	1700	1700	
	B (mm)	550	550	550	550	550	550	550	550	
	C (mm)	635	635	1238	1238	1238	1288	1288	1288	

Condensing temp.: 50°C、Suction super heat: 10K

